RevNo	Revision note	Date	Signature	Checked

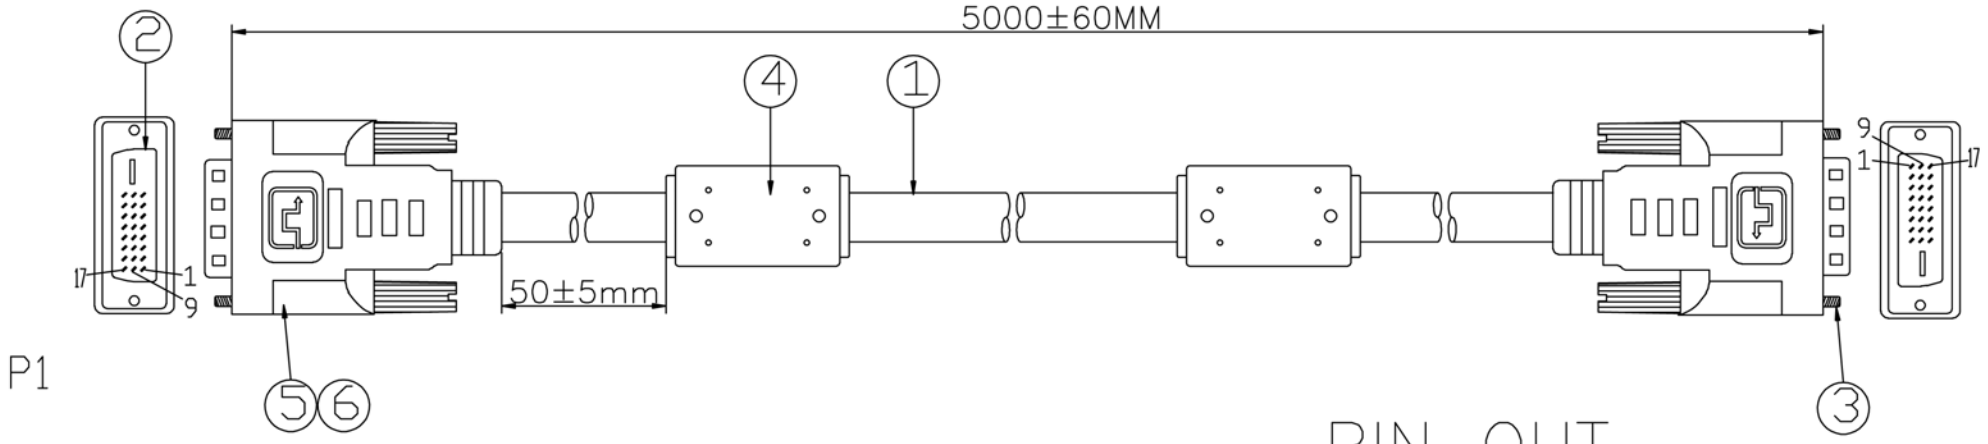

REQUIREMENTS:

1:100% short and open testing.

2:Test conditions
DC300V /10MS
Insulation resistance 10MΩ(Min)
Conduction resistance 5Ω(Max)

PIN OUT

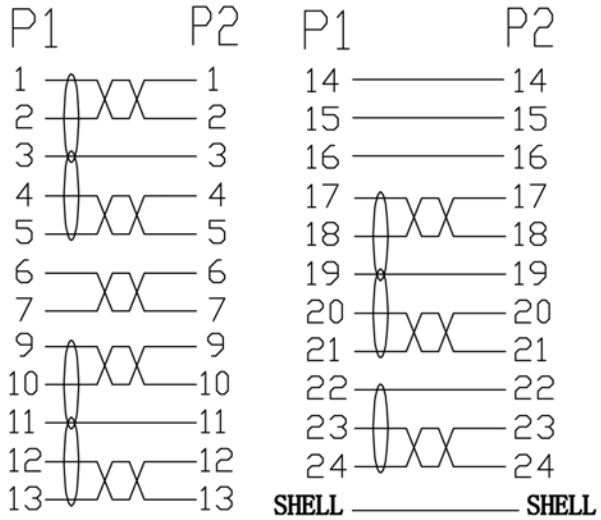

NO.	MATERIAL	DESCRIPTIONG	QTY.	UNIT
⑥	OUTER MOLDED	BLACK 45P PVC	0.028	KG
⑤	INTER MOLDED	LDPE	0.028	KG
④	FERRITE CORE	F5B:RH14*9.3*28.5	2	PCS
③	SCREW	B-L30.5,BLACK PVC	4	PCS
②	CONNECTOR	DVI 18+1/M BLACK INSULATOR,NICKEL PLATED SHELL,GOLD PLATED PIN	2	PCS
①	CABLE	(1P*30#+D+AL+MYLAR)*7C+1P*30#+3C*30#+ADB OD:7.3±0.15 JACKET:BLACK PVC	5	M

Ltemref	Quantity	Title/Name,designation,material,dimension etc		Article No./Reference	
Designed by		Checked by	Approved by - date MARCH 4.2012	File name DVI 24+1/M To DVI 24+1/M	Date MARCH 4.2012	Scale FREE
		26-1653			
		26-1653		Edition 1	Sheet 1/2